




LedKoning

EXTRA WARM WIT COB LED STRIP

384
LEDS P/M

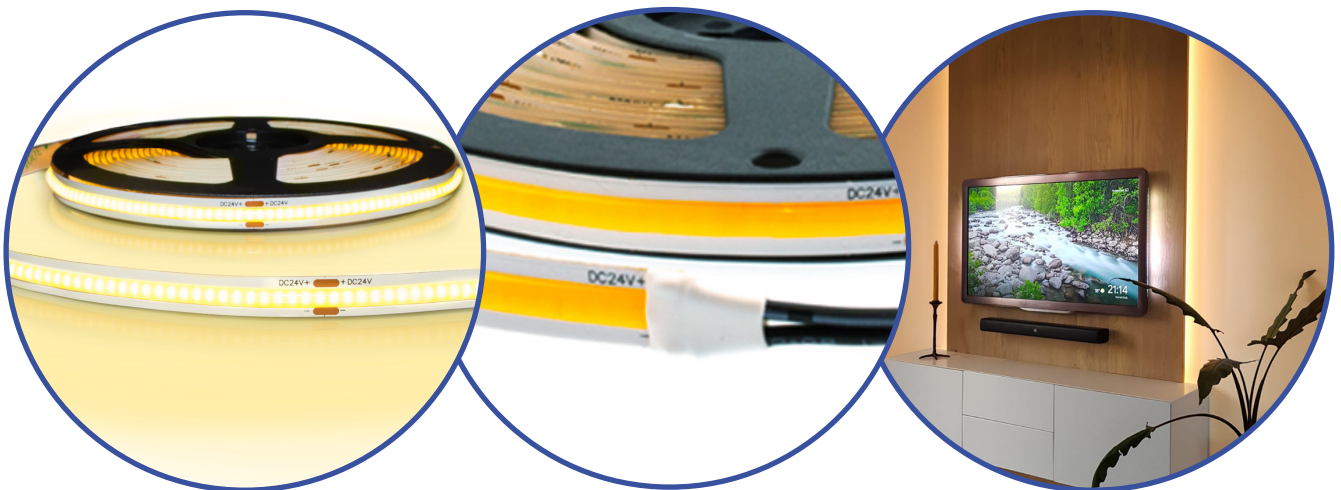

Extra Warm Wit






SPECIFICATIES


Dimbaar	Ja		
3M plakstrip over gehele lengte	Ja		
Garantie	2 jaar		
Op maat te knippen	Elke 8,3 cm		
Aantal LED's p/m	384		
Type LED	COB		
Stralingshoek	180 graden		
Kleur	Extra Warm Wit		
Kleurtemperatuur (Kelvin)	2400		
CRI	94.6		
Lichtsterkte (lumen) p/m	618.8 lm		
Aantal branduren	50.000		
Voltage (DC)	24V		
Watt - vermogen p/m	8.3W		
Lumen per Watt	74.37		
Watt per LED	0,02W		
Bescherming	IP20, IP65 of IP67		
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen		
Achtergrond kleur strip (PCB)	Wit		
Plakstrip	IP20: 3M 300LSE		
Breedte led strip	IP20: 8mm	IP65: 10mm	IP67: 10mm
Dikte led strip	IP20: 1,7mm	IP65: 3,7mm	IP67: 3,7mm
Aansluiting begin	5.5x2.1 DC stekker type vrouw		
Aansluiting einde	5.5x2.1 DC stekker type man		

TECHNISCHE TEKENINGEN

IP20

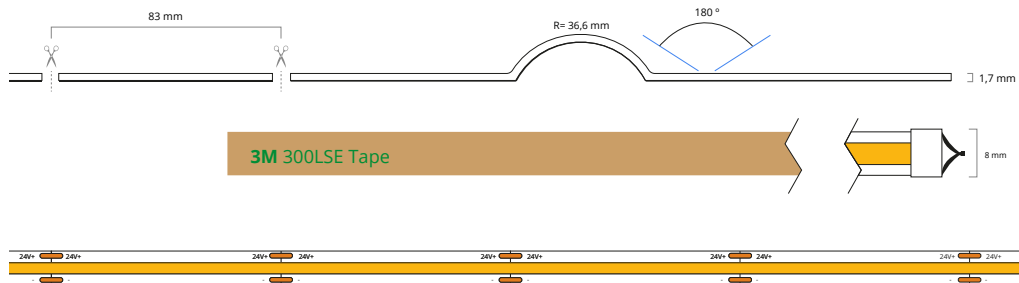

IP65/67

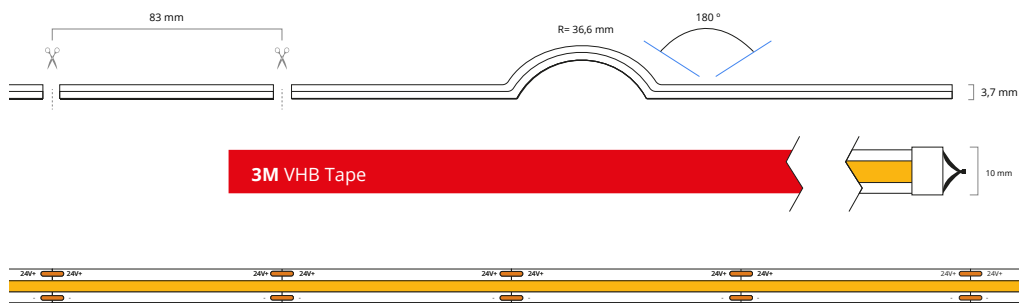

IP20



IP65




IP67





1M COB EXTRA WARM WIT - 384 LEDS P/M

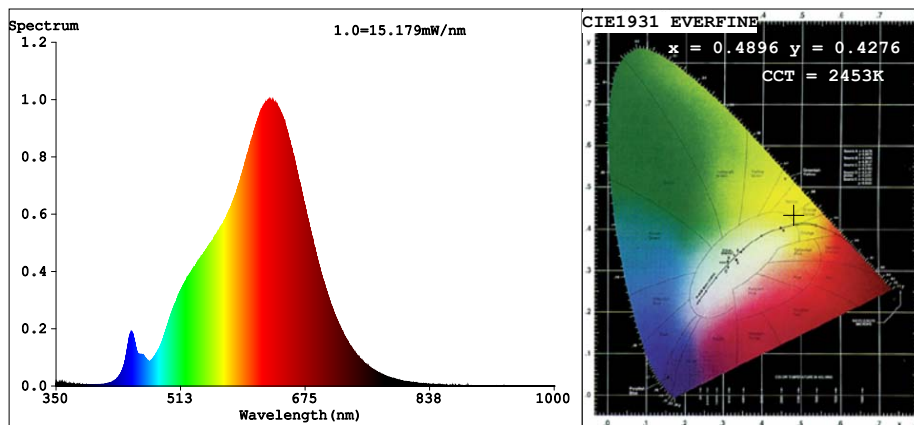

Color Parameters:

Chromaticity Coordinate: $x=0.4896$ $y=0.4276/u'=0.2738$ $v'=0.5381$
 CCT=2453K (Duv=0.0042) Dominant WL:Ld =584.3nm Purity=75.3%
 Ratio:R=28.8% G=69.5% B=1.7% Peak WL:Lp=628.0nm FWHM=133.4nm
 Render Index:Ra=94.6 AvgR=92.0

R1 =95 R2 =96 R3 =95 R4 =98 R5 =95 R6 =97 R7 =96
 R8 =86 R9 =67 R10=89 R11=99 R12=87 R13=95 R14=96 R15=90

Photo Parameters:

Flux = 618.8 lm Eff. : 74.37 lm/W Fe = 2.281 W

Electrical parameters:

V = 23.998 V I = 0.3467 A P = 8.320 W PF = 1.000
 LEVEL:OUT WHITE:OUT

Status: Integral T = 266 ms Ip = 53112 (81%)



CE CERTIFICAAT

AN XIN TESTING CERTIFICATION

Certificate of Conformity



Certification No. : ATT20092500368E
Applicant : Ledkoning
Address : Rietveldenweg 49D
 5222AP 's Hertogenbosch, The Netherlands
Manufacturer : Ledkoning
Address : Rietveldenweg 49D
 5222AP 's Hertogenbosch, The Netherlands
Product Description : 2835 LED Strip
 24K2835-05M1220,24K2835-05M1265,30K2835-05M1220,30K2835-05M1265
 65K2835-05M1220,65K2835-05M1265,24K2835-05M2420,24K2835-05M2465
 30K2835-05M2420,30K2835-05M2465,65K2835-05M2420,65K2835-05M2465
Model : RO2835-05M1220,RO2835-05M1265,RO2835-05M2420,RO2835-05M2465
 GR2835-05M1220,GR2835-05M1265,GR2835-05M2420,GR2835-05M2465
 BL2835-05M1220,BL2835-05M1265,BL2835-05M2420,BL2835-05M2465
 OR2835-05M1220,OR2835-05M1265,OR2835-05M2420,OR2835-05M2465
Trademark : N/A

The above products have been tested by us with listed standards and found in compliance with the Directive 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this Directive.

Test Standards	EN 55015: 2019
	EN 61547: 2009
	EN 61000-3-2:2019
	EN 61000-3-3: 2013+A1:2019

The certificate is based on a single evaluation of tested samples of above-mentioned product. It does not imply an assessment of the whole production and does not permit the use of the test laboratory logo.



Authorized Signer: _____
 Kevin Liu/Manager
 Sep. 27, 2020

Shenzhen An-Xin Testing Service Co., Ltd.
 Room 402-405, Floor 4th, Building C, Yuxing Technology Industrial Park, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
 ☎ 86-0755-23009643 📠 86-0755-23009643 🌐 <http://www.anxinlab.com/>

Adres: Rietveldenweg 49D, 5222AP 's Hertogenbosch
 Tel: +3173 704 1100
 E-mail: info@ledkoning.nl
 Website: www.ledkoning.nl