



LedKoning

CONSTANT CURRENT LEDSTRIP WARM WIT

60
LEDS P/M



Warm wit






SPECIFICATIES


Dimbaar	Ja		
3M plakstrip over gehele lengte	Ja		
Garantie	2 jaar		
Op maat te knippen	elke 5 cm		
Aantal LED's p/m	60		
Type LED	2835 SMD		
Merk LED	Epistar		
Stralingshoek	120 graden		
Kleur	Warm wit		
Kleurtemperatuur (Kelvin)	2700K		
CRI	88.5		
Lichtsterkte (lumen) p/m	418.1 lm		
Aantal branduren	50.000		
Voltage (DC)	24V		
Watt - vermogen p/m	1.494W		
Bescherming	IP20, IP65 of IP67		
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen		
Achtergrond kleur strip (PCB)	Wit		
Plakstrip	IP20: 3M 300LSE	IP65: 3M VHB	P67: 3M VHB
Breedte led strip	IP20: 8mm	IP65: 10mm	IP67: 10mm
Dikte led strip	IP20: 3mm	IP65: 5mm	IP67: 5mm
Aansluiting begin	5.5x2.1 DC stekker type vrouw		
Aansluiting einde	5.5x2.1 DC stekker type man		

TECHNISCHE TEKENINGEN

IP20 24V

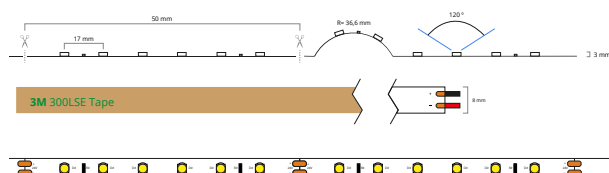

IP65/67 24V

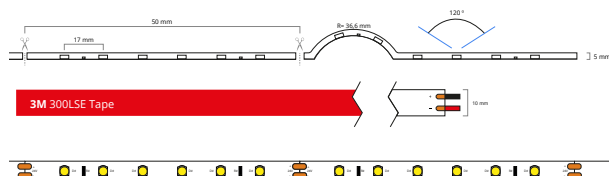

IP20



IP65




IP67





1M HELDER WIT CONSTANT CURRENT - 60 LEDS P/M

Spectrum Test Report

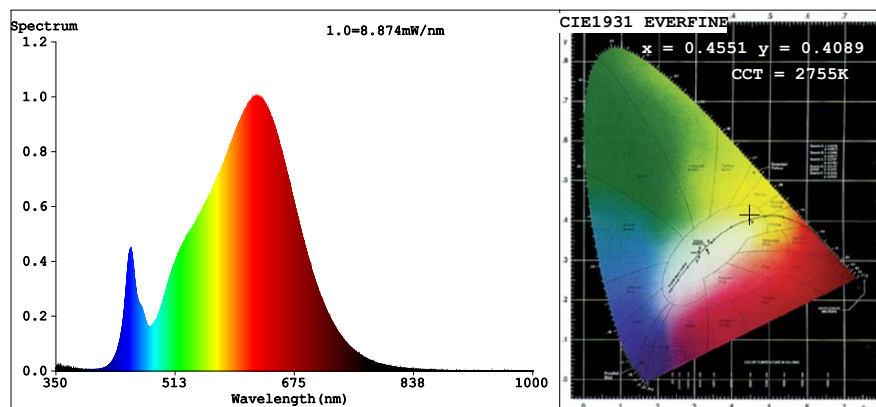

Color Parameters:

Chromaticity Coordinate: $x=0.4551$ $y=0.4089$ $u'=0.2602$ $v'=0.5260$
 CCT=2755K (Duv=-0.0002) Dominant WL:Ld =584.0nm Purity=59.3%
 Ratio:R=25.8% G=72.0% B=2.3% Peak WL:Lp=623.8nm FWHM=154.7nm
 Render Index:Ra=91.6 CRI=88.5

R1 =92 R2 =95 R3 =97 R4 =92 R5 =91 R6 =94 R7 =92
 R8 =81 R9 =57 R10=87 R11=92 R12=80 R13=92 R14=98 R15=88

Photo Parameters:

Flux = 418.1 lm Eff. : 84.62 lm/W Fe = 1.494 W

Electrical parameters:

V = 23.997 V I = 0.2059 A P = 4.941 W PF = 1.000
 LEVEL:OUT WHITE:ANSI_2700K

Status: Integral T = 416 ms Ip = 51444 (78%)

Model:CC2835-60-WW-20-24-10	Number:1M-2700K
Tester:	Date:2020-10-12 19:04:07
Temperature:Deg	Humidity:%
Manufacturer:RYKER LIGHTING	Remarks:---



CE CERTIFICAAT

AN XIN TESTING CERTIFICATION

Certificate of Conformity



Certification No. : ATT20111100456E
Applicant : Ledkoning
Address : Rietveldenweg 49D
 5222AP 's Hertogenbosch, The Netherlands
Manufacturer : Ledkoning
Address : Rietveldenweg 49D
 5222AP 's Hertogenbosch, The Netherlands
Certification : CE-EMC
Product Description : 2835 LED Strip

Model : 27KCC60-10M2420, 27KCC60-10M2465, 27KCC60-15M2420, 27KCC60-15M2465, 27KCC60-20M2420, 27KCC60-20M2465,
 27KCC60-30M2420, 27KCC60-30M2465, 27KCC120-10M2420, 27KCC120-10M2465, 27KCC120-15M2420, 27KCC120-15M2465
 30KCC60-10M2420, 30KCC60-10M2465, 30KCC60-15M2420, 30KCC60-15M2465, 30KCC60-20M2420, 30KCC60-20M2465
 30KCC60-30M2420, 30KCC60-30M2465, 30KCC120-10M2420, 30KCC120-10M2465, 30KCC120-15M2420, 30KCC120-15M2465
 40KCC60-10M2420, 40KCC60-10M2465, 40KCC60-15M2420, 40KCC60-15M2465, 40KCC60-20M2420, 40KCC60-20M2465
 40KCC60-30M2420, 40KCC60-30M2465, 40KCC120-10M2420, 40KCC120-10M2465, 40KCC120-15M2420, 40KCC120-15M2465
 BB27K-05M1220, BB30K-05M1220, BB40K-05M1220, BB65K-05M1220

Trademark : N/A

The above products have been tested by us with listed standards and found in compliance with the Directive 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this Directive.

Test Standards	EN 55015: 2019
	EN 61547: 2019
	EN 61000-3-2: 2019
	EN 61000-3-3: 2013+A1:2019

The certificate is based on a single evaluation of tested samples of above-mentioned product. It does not imply an assessment of the whole production and does not permit the use of the test laboratory logo.



Authorized Signer:



Shenzhen An-Xin Testing Service Co., Ltd.

Room 402-405, Floor 4th, Building C, Yuxing Technology Industrial Park, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
 ☎ 86-0755-23009643 ☎ 86-0755-23009643 🌐 <http://www.anxinlab.com/>

Adres: Rietveldenweg 49D, 5222AP 's Hertogenbosch
 Tel: +3173 704 1100
 E-mail: info@ledkoning.nl
 Website: www.ledkoning.nl